

# Upmatic® 2112



**Upmatic Type 2112 = computer controlled proportioning component weighing machine for fine and coarse products in the food and non-food industries. The weighing range covers, dependent on product, all weight classes from 0,5 up to 25 kg (Weighing without losses).**

A feed belt conveys the product to the distributor system. Two vibrating plates ensure that the product is uniformly spread before it moves via 12 vibrating channels directly into the processing weighing buckets, generously dimensioned.

Within a few milliseconds the high performance computer then assembles the preset weight, calling up the appropriate quantities of product.

A collecting belt then feeds the batch to the appropriate filling and sealing machine.

In this way, the weighing buckets are filled within a very short time.

The Upmatic 2112 operates extremely reliable and reduces weight tolerances to less than 0,5%. With a capacity of 24 tons per hour (in packs of 25 kg).


With its double cover collecting system, the Upmatic 2112D also can feed two packing machines at the same time. In this case, a rate of 60 cycles per minute is possible.

The computer, which can be placed freely, is equipped with a printer and connected to a touch screen.

As real universal weighing machine, the Upmatic 2112 is suitable for fine and coarse product in the food and non-food industries, such as onions, potatoes, nuts, carrots (cut or cubic), lettuce, grated celery, Bussers sprouts, sweets, or even products like fish or scampi (fresh or deep frozen).

Different programs enable the machine to work at high speed while still remain easy to operate.

# UPMATIC® 2112

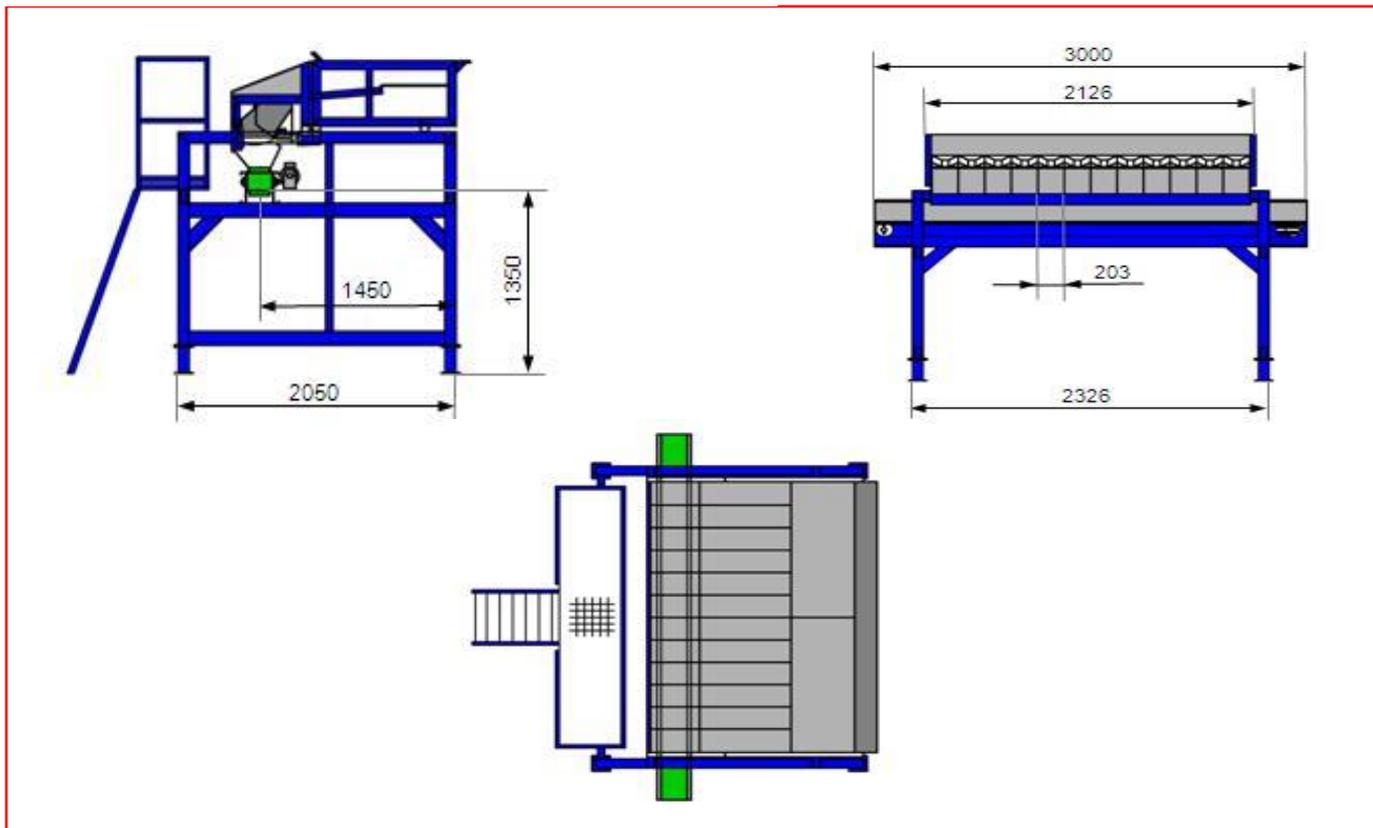

The high precision weigher Upmatic 2112 can be combined with all current filling and sealing machines. Upmann also supplies the associated feed belts as well as processing equipment to make up complete

The measurements may change according to individual combination with filling and closing machines.

In the interest of our customers, we reserve the right to introduce technical changes.

For more information: (819) 395-4223  
Email address: [coderre@embcoderre.com](mailto:coderre@embcoderre.com)  
[www.embcoderre.com](http://www.embcoderre.com)

## Technical Data

- Weighing range: 0,5 - 25 kg
- Rate: Packs of 2,5 kg approx. 28 cycles/min.
- Power supply: 230/400 V, 50 Hz
- Power consumption: 4 kW
- Air pressure: 6 bar
- Air consumption: 2,6 l / cycle
- Weight: 1100 kg

## Accessories :

- Feed belts in individual sizes
- Full indicators
- Chutes
- Collecting belts
- Platforms in individual sizes
- Remote maintenance with network connexion