

Upmatic® 2112DV

ENGLISH



Upmatic Type 2112DV = computer controlled proportioning component weighing machine for fine and coarse products in the food and non-food industries. The weighing range covers, dependent on product, all weight classes from 0,5 up to 25 kgs (Weighing without losses).

The Upmatic 2112DV convinces by her solid construction and offers precision and high speed. A feed belt conveys the product to the distributor system.

Two vibrating plates ensure that the product is uniformly spread before it moves via 12 vibrating channels directly into the predosing weighing buckets.

In this way, the weighing buckets are filled within a very short time.

Within a few milliseconds the high performance computer then assembles the preset weight, calling up the appropriate quantities of product.


A collecting belt then feeds the batch to the appropriate filling and sealing machine.

The Upmatic 2112DV operates extremely reliable and reduces weight tolerances to less than 1,0 %.

As real universal weighing machine the Upmatic 2112DV is suitable for fine and coarse products in the food and non-food industry, such as onions, potatoes, nuts, carrots (cut or cubic), lettuce, grated celery, Brussels sprouts, sweets, or even products like fish or scampi (fresh or deep frozen).

Different programs tailored to specific products enable the machine to be run at high speed while still remaining easy to operate.

Upmatic® 2112DV

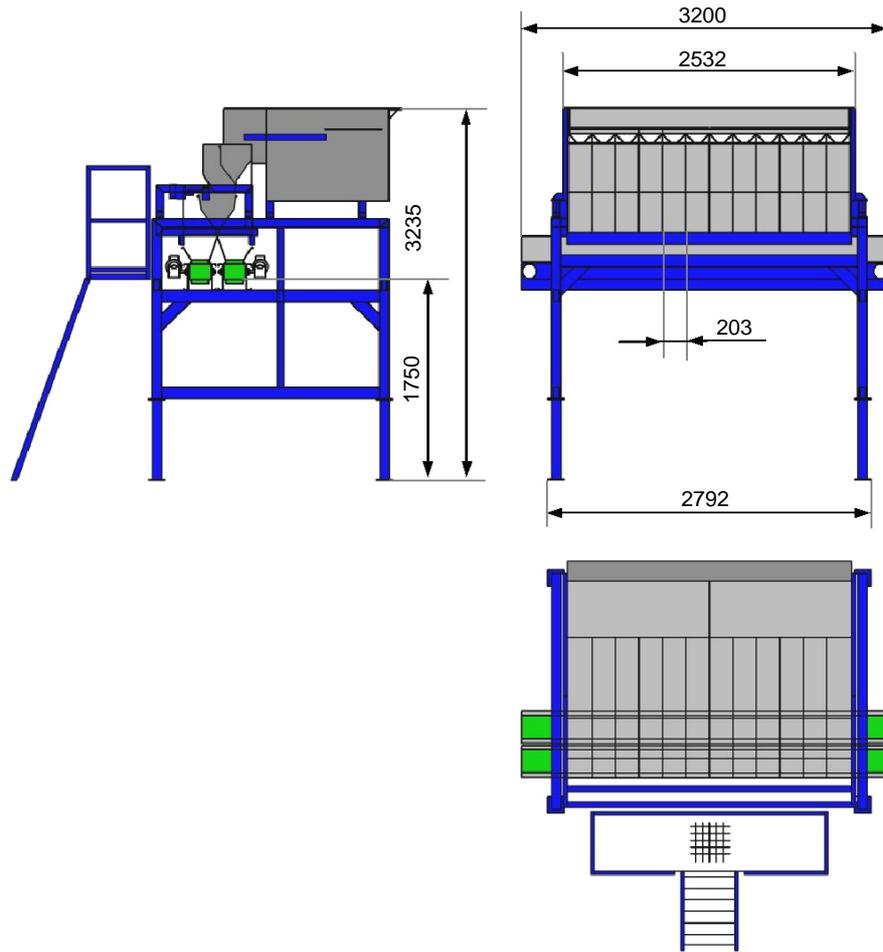

The high precision weigher Upmatic 2112DV can be combined with all current filling and sealing machines. Upmann also supplies the associated feed belts as well as processing equipment to make up complete

The measurements may change according to individual combination with filling and closing machines.

In the interest of our customers, we reserve the right to introduce technical changes.

Technical Data:

- Weighing range: 0,5 – 25 kgs
- Capacity:
 - bags of 25 kg approx. 25 tons/hour
 - Bags of 0,5 kg approx 70 bags/Min.
- Power supply : 230/400 V, 50 Hz
- Power consumption: 4 kW
- Air pressure: 6 bar
- Air consumption: 8 l / cycle
- Weight: 1800 kg
- Air consumption: 8 l / cycl

Type of machines:

- **Upmatic 2112DV:** Standard model, steel lacquered Blue / Silver hammer dimple
See illustration and explanatory text.
- **Upmatic 2112DVE:** identically with the 2112DV, but machine completely in stainless steel

Accessories:

- Feed belts in individual sizes.
- Full indicators
- Chutes
- Collecting belts
- Platforms in individual sizes



For more informations: (819)-395-4223
Email adress: coderre@embcoderre.com
www.embcoderre.com

